NOTES:


1. SUBSTRATE: IR GRADE FUSED SILICA


2. COATING:

\$1 & \$2: R(AVG) ≤ 0.5% FROM 350-700nm @ 0° AOI

3. CENTERING: < 3 ARCMIN

4. RoHS: COMPLIANT



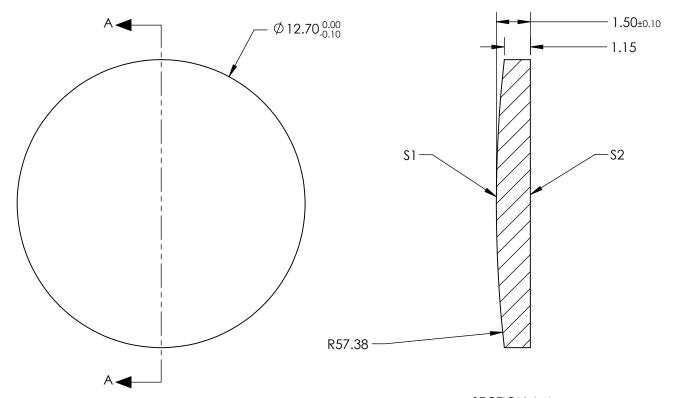

,

SECTION A-A

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

	\$1	\$2	
SHAPE	CONVEX	PLANO	
SURFACE QUALITY	20-10	20-10	
CLEAR APERTURE	Ø11.43	Ø11.43	
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	

		Edmund Optics®
THIRD ANGLE PROJECTION	TITLE	12.7mm Diameter x 125mm FL, 350-700nm,

HIRD ANGLE TITLE		12.7mm Diameter x 125mm FL, 350-700 Ultrafast Thin PCX Lens	, ,	
ALL DIMS IN	mm	DWG NO	22636	SHEET 4 OF 19